

HFD2

SUBMINIATURE DIP RELAY



File No.:E133481



Features

- High sensitive: 150mW
- Matching standard 16 pin IC socket
- High switching capacity 60W/125VA
- Bifurcated contacts
- Epoxy sealed for automatic wave soldering and cleaning
- Single side stable and latching type available
- Environmental friendly product available (RoHS compliant)
- Outline Dimensions: 20.2 x 10.0 x 10.6 mm

CONTACT DATA

| | |
|----------------------------|--|
| Contact arrangement | 2C |
| Initial contact resistance | 50mΩ |
| Contact material | see ordering info. |
| Contact rating (Res. load) | 2A 30VDC 1A 125VAC |
| Max. switching power | 60W / 125VA |
| Max. switching voltage | 220VDC / 250VAC |
| Max. switching current | 2A |
| Min. applicable load | 10mV 10μA |
| Electrical life | 1 x 10 ⁵ OPS (at 2A 30VDC) 5 x 10 ⁵ OPS (at 1A 30VDC) |
| Mechanical life | 1 x 10 ⁶ OPS |

CHARACTERISTICS

| | |
|-------------------------------|--|
| Initial insulation resistance | 1000MΩ (at 500VDC) |
| Dielectric strength | Contacts to coil 1coil: 1500VAC 1min. 2coil: 1000VAC 1min. |
| | Contacts to contact 1000VAC 1min. |
| Operate time (at nomi. volt.) | Max. 4ms |
| Release time (at nomi. volt.) | Max. 3ms |
| Set time (latching) | 3ms |
| Reset time (latching) | 3ms |
| Bounce time | 1.5ms |
| Ambient temperature | -40 °C to +85 °C |
| Humidity | 5 to 85% RH |
| Vibration resistance | 10 to 55Hz 196m/s ² (20g) |
| Shock resistance | Functional 490m/s ² (50g) |
| | Destructive 980m/s ² (100g) |
| Capacitance | Contact to contact 2.0pF |
| | Contact set to contact 1.5pF |
| | Contact to coil 5.0pF |
| Termination | PCB (DIP) |
| Unit weight | 4.5g |
| Construction | Sealed IP67 |

COIL

| | | | |
|------------------|--------------------|-----------|----------|
| Coil power | | Sensitive | Standard |
| | Single side stable | 150mW | 200mW |
| | 1 coil latching | 75mW | 100mW |
| | 2 coils latching | 150mW | 200mW |
| Temperature rise | Max. 65 °C | | |

COIL DATA

Single side stable Standard (200mW) at 20 °C

| Order Number | Nominal Voltage (VDC) | Pick-up Voltage (VDC) | Drop-out Voltage (VDC) | Coil Resistance (Ω±10%) | Max. Allowable Voltage (VDC) |
|--------------|-----------------------|-----------------------|------------------------|-------------------------|------------------------------|
| 003-M | 3 | 2.30 | 0.3 | 45 | 6 |
| 005-M | 5 | 3.75 | 0.5 | 125 | 10 |
| 006-M | 6 | 4.50 | 0.6 | 180 | 12 |
| 009-M | 9 | 6.75 | 0.9 | 405 | 18 |
| 012-M | 12 | 9.00 | 1.2 | 720 | 24 |
| 015-M | 15 | 11.25 | 1.5 | 1125 | 30 |
| 024-M | 24 | 18.0 | 2.4 | 2880 | 48 |
| 048-M | 48 | 36.0 | 4.8 | 11520 | 96 |

Single side stable Sensitive (150mW) at 20 °C

| Order Number | Nominal Voltage (VDC) | Pick-up Voltage (VDC) | Drop-out Voltage (VDC) | Coil Resistance (Ω±10%) | Max. Allowable Voltage (VDC) |
|--------------|-----------------------|-----------------------|------------------------|-------------------------|------------------------------|
| 003-S | 3 | 2.4 | 0.3 | 60 | 7.0 |
| 005-S | 5 | 4.0 | 0.5 | 167 | 11.5 |
| 006-S | 6 | 4.8 | 0.6 | 240 | 13.8 |
| 009-S | 9 | 7.2 | 0.9 | 540 | 20.8 |
| 012-S | 12 | 9.6 | 1.2 | 960 | 27.7 |
| 015-S | 15 | 12.0 | 1.5 | 1500 | 34.6 |
| 024-S | 24 | 19.2 | 2.4 | 3840 | 55.4 |

COIL DATA

1 coil latching Standard (100mW) at 20 °C

| Order Number | Nominal Voltage (VDC) | Set / Reset Voltage (VDC) | Coil Resistance ($\Omega \pm 10\%$) | Max. Allowable Voltage (VDC) |
|--------------|-----------------------|---------------------------|---------------------------------------|------------------------------|
| 003-M-L1 | 3 | 2.25 | 90 | 8.4 |
| 005-M-L1 | 5 | 3.75 | 250 | 14 |
| 006-M-L1 | 6 | 4.5 | 360 | 17 |
| 009-M-L1 | 9 | 6.75 | 810 | 25 |
| 012-M-L1 | 12 | 9.0 | 1440 | 34 |
| 015-M-L1 | 15 | 11.25 | 2220 | 42 |
| 024-M-L1 | 24 | 18.0 | 4000 | 56 |

1 coil latching Sensitive (150mW) at 20 °C

| Order Number | Nominal Voltage (VDC) | Set / Reset Voltage (VDC) | Coil Resistance ($\Omega \pm 10\%$) | Max. Allowable Voltage (VDC) |
|--------------|-----------------------|---------------------------|---------------------------------------|------------------------------|
| 005-S-L1 | 5 | 4.0 | 330 | 16 |
| 006-S-L1 | 6 | 4.8 | 480 | 19 |
| 009-S-L1 | 9 | 7.2 | 1080 | 29 |
| 012-S-L1 | 12 | 9.6 | 1920 | 39 |
| 015-S-L1 | 15 | 12.0 | 3000 | 43 |
| 024-S-L1 | 24 | 19.2 | 7680 | 78 |

2 coils latching Standard (200mW) at 20 °C

| Order Number | Nominal Voltage (VDC) | Set / Reset Voltage (VDC) | Coil Resistance ($\Omega \pm 10\%$) | Max. Allowable Voltage (VDC) |
|--------------|-----------------------|---------------------------|---------------------------------------|------------------------------|
| 003-M-L2 | 3 | 2.25 | 45 | 6 |
| 005-M-L2 | 5 | 3.75 | 125 | 10 |
| 006-M-L2 | 6 | 4.5 | 180 | 12 |
| 009-M-L2 | 9 | 6.75 | 405 | 18 |
| 012-M-L2 | 12 | 9.0 | 720 | 24 |
| 015-M-L2 | 15 | 11.25 | 1125 | 30 |
| 024-M-L2 | 24 | 18.0 | 2040 | 48 |

2 coils latching Sensitive (150mW) at 20 °C

| Order Number | Nominal Voltage (VDC) | Set / Reset Voltage (VDC) | Coil Resistance ($\Omega \pm 10\%$) | Max. Allowable Voltage (VDC) |
|--------------|-----------------------|---------------------------|---------------------------------------|------------------------------|
| 005-S-L2 | 5 | 4.0 | 167 | 11.5 |
| 006-S-L2 | 6 | 4.8 | 240 | 13.8 |
| 009-S-L2 | 9 | 7.2 | 540 | 20.8 |
| 012-S-L2 | 12 | 9.6 | 960 | 27.7 |
| 015-S-L2 | 15 | 12.0 | 1500 | 34.6 |
| 024-S-L2 | 24 | 19.2 | 3840 | 55.4 |

Notes: When user's requirements can't be found in the above table, special order allowed.

SAFETY APPROVAL RATINGS

| | |
|-------------------|--|
| UL&CUR | 0.5A 60VDC 2A 25VDC 1A 100VAC (industrial control, business equipment) |
| | 1A 120VAC (Telephone equipment) 2A 125VAC |

TYPICAL CONTACT LIFE EXPECTANCY


| Voltage | Power | Number of operations | |
|---------|-------|----------------------|--|
| | | Resistive Load | Inductive Load (For AC $\cos \phi = 0.7$) |
| 50mVDC | 50uW | 5×10^7 | 5×10^7 |
| 30VDC | 20W | 3×10^6 | 1×10^6 |
| 30VDC | 30W | 1×10^6 | 3×10^5 |
| 30VDC | 60W | 1×10^5 | 1.5×10^4 |
| 60VDC | 20W | 3×10^6 | -- |
| 60VDC | 30W | 5×10^5 | -- |
| 60VDC | 60W | 1×10^5 | -- |
| 30VAC | 40VA | 3×10^6 | 1×10^6 |
| 30VAC | 80VA | 1×10^6 | 3×10^5 |
| 30VAC | 120VA | 1×10^5 | 1.5×10^4 |
| 60VAC | 40VA | 3×10^6 | 1×10^6 |
| 60VAC | 80VA | 1×10^6 | 3×10^5 |
| 60VAC | 120VA | 1×10^5 | 1.5×10^4 |
| 125VAC | 40VA | 3×10^6 | 1×10^6 |
| 125VAC | 80VA | 1×10^6 | 3×10^5 |
| 125VAC | 125VA | 1×10^5 | 1.5×10^4 |

ORDERING INFORMATION

| | | | | | | | |
|------------------------------|--|---|--|-------------------------|----|---|-----|
| Type | | HFD2 / 012 | | S | L2 | D | XXX |
| Coil voltage | | 3, 5, 6, 9, 12, 15, 24, 48VDC(Standard Single only) | | | | | |
| Coil power | | M: Standard S: Sensitive | | | | | |
| Sort | | L1: 1 coil latching L2: 2 coils latching | | Nil: Single side stable | | | |
| Contact material | | D: Ag-AuAg8 / Ag-AuAg8 | | Nil: AgPd60 / Ag-AuAg8 | | | |
| Customer special code | | (Only for special requirements, e.g. 555 stands for RoHS compliant) | | | | | |


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

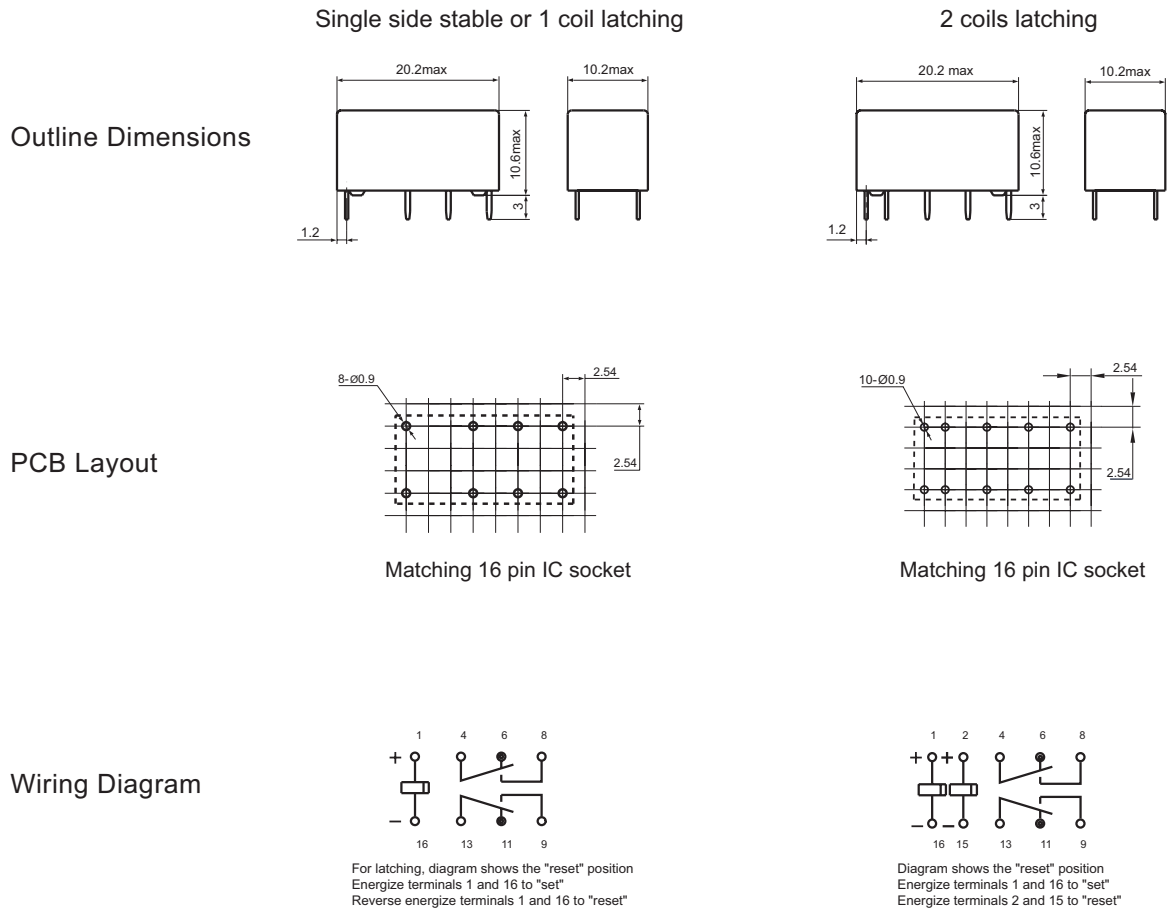

CHARACTERISTIC CURVES

MAXIMUM SWITCHING POWER

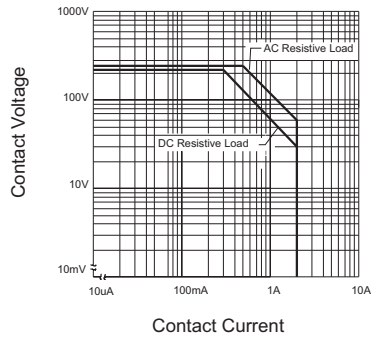

COIL TEMPERATURE RISE

